

GB150 12V **4000A** | **10.0L+**
Lithium | Gas + Diesel

Wet Gel MF EFB AGM
Auto | Marine | RV | Powersport | Lawn & Garden

NOCO BOOST[®] PRO[™] JUMP STARTER



START DEAD BATTERIES.[™]

Gas And Diesel Cars, Trucks, Boats, Commercial Vehicles, Equipment & More.

UltraSafe, ultra-compact, rugged, and portable lithium-ion jump starter. Features spark-proof technology and reverse polarity protection. Ideal for the widest range of engines, including gas and diesel engines up to 10.0L+. Equipped with an advanced integrated voltmeter. Provides remote power with 12V plug (included) for tire pumps, inverters, & phone chargers.



SPARK PROOF.

Safely connect to any 12-volt car battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

JUMP START. 80X

Full power to jump start a vehicle up to 80 times in one charge. Compatible with gas and diesel engines up to 10.0L+.

USB CHARGE & RECHARGE.

It's internal battery can be used to recharge any personal mobile devices like smartphones, tablets, or any other USB device, and can be recharged by any powered USB port.

500 LUMENS. 10X LED

The GB150 portable car battery jump starter integrates with a high-output 500 lumen LED flashlight with 7 light modes: low, medium, high, flashing, strobe, and emergency SOS.

MORE POWER.

A Fraction Of The Size.

2X

Lighter & Smaller

Compact, portable, pocket-sized jump starter that stores easily in a vehicle.

1 Year+

Holds Charge 4x Longer

The GB150 holds the charge four times longer to extend battery power life and eliminate charge time.

3X Fast Recharge

Go from zero to jump starting in 15 minutes, fully charges in just over 2 hours.

Compared to Leading Traditional Lead Acid Jump Starters

Voltmeter

Built-In Voltmeter Reads The Voltage Of The Vehicle's Battery For Enhanced Diagnostics And Troubleshooting.



Error LED. Illuminates Red if reverse polarity is detected.



Manual Override. Is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.



NOCO Patented Technology

Patented: visit no.co/patents



Recharge Unit from any USB or 12V port.

USB 2.1A

Charge virtually any USB device, including Smartphones and Tablets.

12V Portable Power

Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.

Technical Specifications

Internal Battery:	89 Watt-Hour Lithium Ion	Micro USB (Input) & USB (Output):	5V, 2.1A
Peak Current Rating:	4000A	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-4°F to +122°F (-20°C to +50°C)	Cooling:	Natural Convection
Charging Temperature:	32°F to +104°F (0°C to +40°C)	Dimensions (LxWxH):	12.4 x 7.3 x 2.7 in
Storage Temperature:	-4°F to +122°F (-20°C to +50°C)	Unit Weight:	6 lbs
12V (Input):	12V (5A)	Unit Weight & Accessories:	7.5 lbs
12V (Output):	12V (15A)	LED Flashlight Brightness:	500 Lumens

Recharging a GB150

(for reference, results may vary)

USB Charger Rating	Charging Time	12V Fast Charge
.5A	45hr	5A @ 12V (36W) 2-3hr
1A	22hr	
2A	11hr	

Retail Packaging:

Dimensions: 8.19"x4.88"x13.70"
Weight: 8.00lbs
UPC: 0-46221-15006-3

Inner Carton:

Dimensions: 14.09"x8.78"x5.79"
Weight: 8.46lbs

Master Carton:




Dimensions: 14.76"x9.25"x12.50"
Weight: 17.97lbs
Quantity: 2
UCC: 10046221150060

Units Per Pallet:

NA - 100 Units
EU - 72 Units

What's In The Box

- GB150 Lithium Jump Starter
- XGC 12V Male Adapter
- XGC 12V Female Adapter
- Micro USB Cable
- Microfiber Storage Bag
- User Guide & Warranty Information

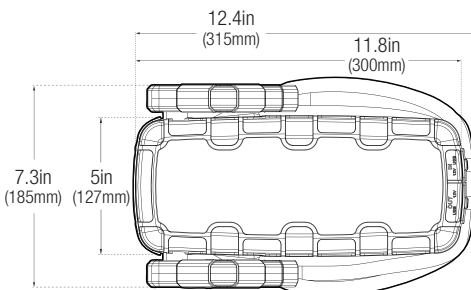

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO

GB150 Litium **4000A** 12V

10,0L+
Gas & Diesel



Bil | Marin | Husbil | Kraftsport | Gräsmatta och trädgård

Genius **BOOSTPRO** Snabbstartare™



NOCO
12V
Professional™

Snabbstartar ett dött batteri säkert på några sekunder.

För bensin- och dieselmotorer med högt deplacement i bilar, lastbilar, båtar, kommersiella fordon, utrustning med mera.

Ultra-säker, ultra-kompakt, ruggad och bärbar litium-ion-snabbstartare. Har funktioner för gnistsäker teknik och omvänt polaritetsskydd. Idealisk för det bredaste urvalet av motorer, inklusive bensin/diesel 10,0 L+. Utrustad med en avancerad 12,1 V voltmätare. Ger fjärrström med 12V kontakt (inkl) för däckpumpar, omriktare och telefonladdare.



UltraSafe™

Skyddar mot omvänt polaritet, gnistor, överladdning, överströmstyrka, öppna kretsar och överhettning.

80X

snabbstartar per laddning

Full strömstyrka för att snabbstarta ett fordon upp till 80 gånger på enladdning. Kompatibel med bensin- och dieselmotorer 10,0L+.



2.1A

USB

Omladdar i stort sett alla USB-enheter (smartphones, surfplattor). Omladda enheten från alla USB-uttag eller 12 V laddare.

10XLED

500 lumen ultra-ljusstark LED-ficklampa för synlighet och med 7 lägen, inklusive SOS och nödlägesstroboskop.

För **bensin-** och **dieselmotorer 10,0 L+** säker att använda för motorer i alla storlekar.

The NOCO Company
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626


no.co

NOCO
Since 1914

2X Mer ström,
en bråkdel av storleken.

+ håller laddningen 4 gånger längre

Tillgänglig startkraft (Joule) = Effekt (W) X tid (sek)



mot



Genius **BOOSTPRO**™

Ledande Traditionell Snabbstartare

7,5lbs
22500 joules^{3S}

18lbs
6950 joules^{3S}

4X Snabb
Omladdning

Gå från noll till snabbstart på
15 minuter, fulladdad på drygt
3 timmar.

Voltmätare
12.9_V

Inbyggd voltmätare läser av
spänningen i fordonets batteri för
förbättrad diagnos och felsökning.

Manuell Manövrering är en specialfunktion utformad för sällsynta situationer när ett fordonets batteri ligger under 2 volt. Tryck helt enkelt på och håll inne knappen för manuell manövrering i 3 sekunder, tills Boost-LED-lampan börjar blinka, för att komma till läget. Tryck på knappen igen (eller strömknappen) för att lämna manuell manövrering. Detta läge bör användas med försiktighet, då manuell manövrering avaktiverar säkerhetsskyddet när det är aktiverat.



Tekniska specifikationer

Internt batteri:	Litium Ion	Mikro-USB (In):	5 V 2,1A
Strömtoppsbedömning:	4000A	USB (Ut):	5 V 2,1A
Joules ^{3S} :	22500+	Skydd för hus:	IP65 (m/ stängda uttag)
Drifttemperatur:	-30°C to +50°C	Kylning:	Naturlig Konvektion
Laddningstemperatur:	0°C to +40°C	Dimensioner (LxBxH):	12,3 x 7 x 2,7 in
Lagringstemperatur:	-20°C to +50°C	Vikt:	7,5 Pounds
12V (In/Ut):	12 V, 3 A IN / 12 V, 15 A UT	Lumen (LED-lampor):	500L



Vad finns i lådan

- GB150 litium-snabbstartare m/HD batteriklämmor
- Mikro-USB-kabel
- 12 V honkontakt (UT)
- 12 V hankontakt (IN)
- 12 V XGC kabel
- Användarmanual och informationshandledning och garanti

Omladdning av GB150

(för referens, resultaten kan variera)

Rangordning för USB-laddare	Laddningstid	12 V snabbaddning
0,5A	45 tim	3 A @ 12 V (36 W)
1A	22 tim	2-3 tim
2A	11 tim	

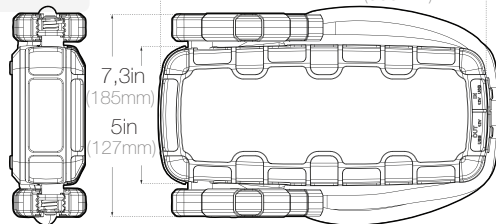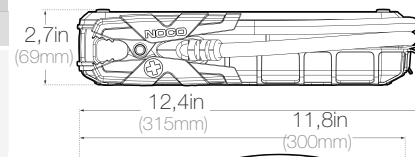

Förpackning:
Dimensioner: 9,2"x16,9"x4,02"
Vikt: 7,5 lbs
UPC: 0-46221-15006-3
Innerkartong:
Dimensioner: 4,5"x9,7"x17,5"
Vikt: 8 lbs

Huvudkartong:
Dimensioner: 10,0"x18,2"x10,6"
Vikt: 17,5lbs
Kvantitet: 4
UCC: 10046221150060
Enheter per pall: 100 Units



The NOCO Company
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO
Since 1914